


24-hour Network Camera Monitoring Automatic Camera Restart

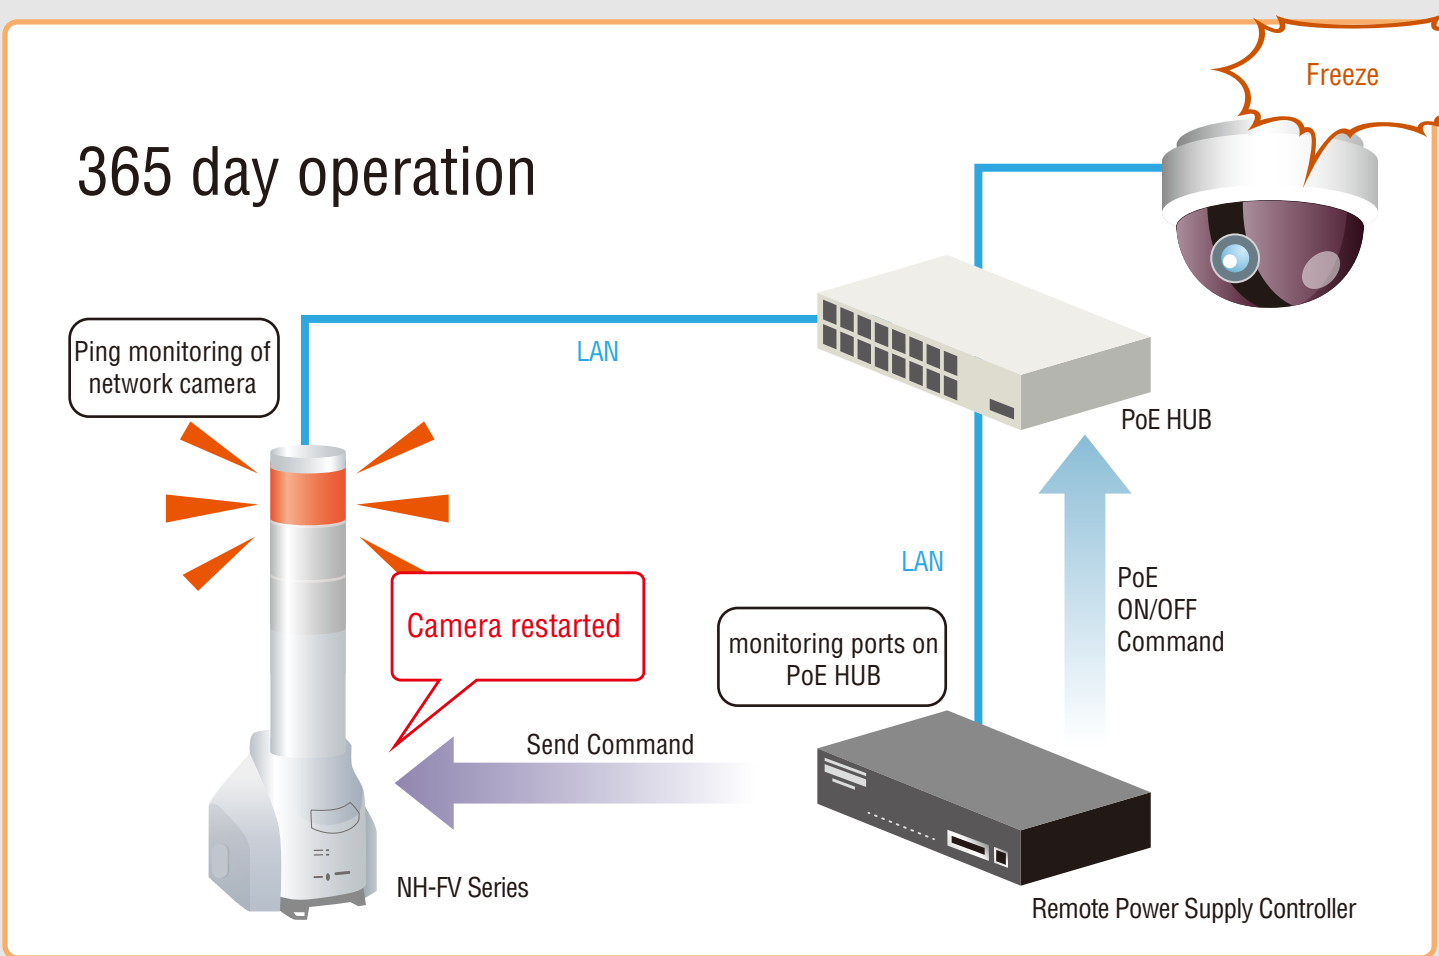

Before

The camera freezes and stops recording, but there are no operators at the site to realize and address the issue. Additionally, it is inefficient to send an operator to the site every time the camera needs to be reset.

After

When the network camera freezes, the remote power controller used to monitor the port automatically restarts the camera. The PATLITE NH-FV series uses ping monitoring and in the event the camera cannot recover automatically, the NH-FV alerts via visual, audible, and email notifications. With this sort of configuration you can use network cameras with confidence.

MP3 Playback Network Monitoring Signal Tower NH-FV Series



88 dB Sound resonates

With its compact housing, the unique horn structure achieves sound pressure of 88 dB or more (at 1 meter).

Play Sound Voice message notification

With audible alerts, you can play messages that tell you "what and how that's a problem"

Actively get the equipment status

In addition to PING monitoring, the NH Signal Towers are equipped with an SNMP monitoring function. It actively obtains MIB information from supported SNMP network devices and is able to notify personnel with visual, audible and/or email alerts when changes occur.