


[Specifications]	
Model	SZ-200A
Application Models	RH(B)-A(UL)、RK(B)-A(UL)、 RHE(B)、RKE(B)、KHE
Mounting Direction	Upright
Mass(±10%)	48g

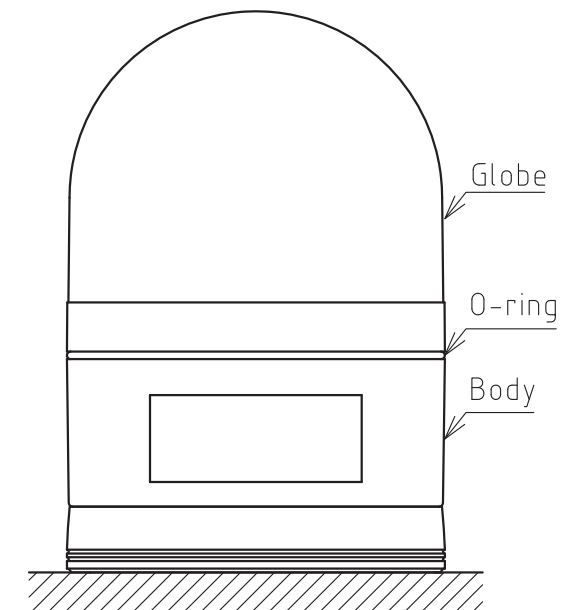

Mounting Example(1:2)

- [Note]
- 1.Install the unit on the iron plate more than 1mm thickness on plate has same hardness as it to keep the waterproof construction.(IP55 / IEC 60529).
 - 2.Wiring the power wire and the signal wire after passing through model SZ-200A.
 - 3.Do not pinch wires with model SZ-200A to keep the waterproof construction.
 - 4.In case of mounting model SZ-200A to buzzer type unit, the sound pressure is lower -5dB at front side and -10dB at back side.
 - 5.Please install the O-ring between Globe and Body.
(It is unnecessary for the model which has already been attached.)
 - 6.There are no contents of controlled substances exceeding the threshold for the RoHS Directive.

1			1	EPDM	Gray
番号 No.	部品名 Part Name	品目コード Part No.	数量 Qty.	材料 & 寸法 & 処理 Material & Size & Finish	記事 Remarks
				外観図面 Outer Dimension Drawing	
				株式会社 パトライト PATLITE Corporation	
				SZ-200A-W18C	