

PATLITE®

WME-D
FLUSH-MOUNTED SIGNAL TOWER



Easy vertical and
horizontal installation
with mounting bracket

Superior durability
and light transmission


WME-D CONTINUOUS

WME-DFB CONTINUOUS / FLASHING / AUDIBLE ALARM




The Flush-Mounted Signal Tower

The WME Series features an 80mm diameter modular design, up to 5 ultra-bright LED units, and a 93dB audible alarm for effective signaling and enhanced durability.

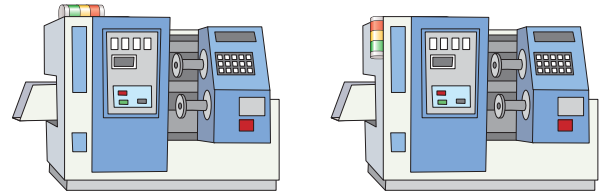


- Built-in audible alarm with up to 93dB
- Can be installed vertically or horizontally
- Easy to install with included metal fittings
- NPN/PNP compatible (NPN only for AC models)

Dimensions

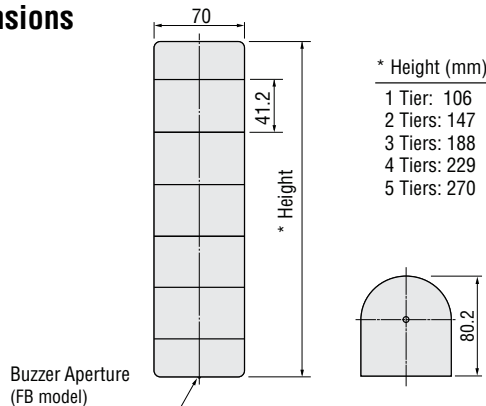

Mounting Direction

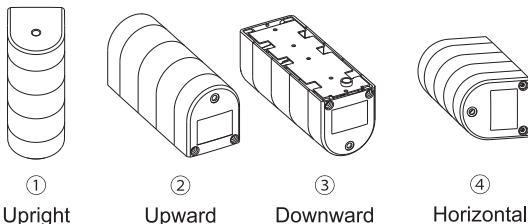

* To maintain IP54 for FB model, install the unit with the buzzer aperture pointing down.

Specifications

Product Name	Signal Tower
Model	WME-□02DFB
Rated Voltage	24V DC
Operating Voltage Range	Rated Voltage ± 10%
Signal Wire Current / Power Consumption	201mA Max (5 tier and alarm)
Mounting Location	Indoor Only
Protection Rating	IP54 (IEC 60529) (for upright mounting only)
Vibration Resistance	20m/s ² (JIS C 60068-2-6)
Alarm Sound	Alarm1 - Rapid, Intermittent Beep (1/2620Hz) Alarm2 - Rapid, Intermittent Beep (2/2620Hz)
Sound Pressure	93dB
Environmental	Alarm1 - measured from front direction of alarm opening at 1m
Conformity Standards	UL 508, CSA-C22.2 No.14 RoHS Directive (EN 50581) EMC Directive (EN 61000-6-4) FCC Part 15 SubpartB Class A

How to Order

WME-502DFB-RYGBC

Model	Number of tiers	Rated Voltage	Specifications	Colors
02	24V DC	M2	100 - 240V AC	Blank
				Continuous
				FB
				Continuous / Flashing / Audible Alarm
				R Red
				Y Amber
				G Green
				B Blue
				C White

From Top to Bottom

PATLITE (U.S.A.) Corporation

20130 S. Western Ave. Torrance, CA 90501, U.S.A.
TEL.+1-310-328-3222 FAX.+1-310-328-2676 E-mail: sales@patlite.com

www.patlite.com